



Model	COM	Ethernet	Monitoring	Alarm	Data Record	Validity	WIFI / 4G	Pass-through	Script
V-BOX H-00	4 in 3	3	300	200	50	90 days / 1 millions	N/A	Serial / WVPN	Yes
V-BOX H-4G	4 in 3	3	500	300	100	180 days / 1 millions	4G	Serial / WVPN	Yes
V-BOX H-AG (global)	4 in 3	3	600	300	100	180 days / 1 millions	4G	Serial / WVPN	Yes
V-BOX H-WF	4 in 3	3	300	200	50	90 days / 1 millions	WIFI	Serial / WVPN	Yes

SPECIFICATIONS

Items	V-BOX H-00	V-BOX H-4G	V-BOX H-AG	V-BOX H-WF
OS			Linux	
CPU			Cortex A7	
Flash			128MB	
RAM			DDRIII 128MB	
SD Card			N/A	
MICRO USB			USB Host/Device : USB OTG Switch	
			COM1 : RS232, RS485/RS422 (2 in 1)	
Serial Port			COM2 : RS485	
			COM3 : RS485	
Digital I / O			2 inputs with optocoupler isolation; 2 relay outputs	
Ethernet Port			3 Ethernet ports (2*LAN+1*WAN)	
WIFI Module	N/A	N/A	N/A	YES
Power Supply			24VDC (12~28VDC)	
Power Consumption			<10w	
Enclosure			PC+ABS	
Dimension (W*H*D)			131.0mm*100.5mm*46.0mm	
Weight (KG)			0.3	
Vibration Resistance			10~25Hz (X, Y, Z direction 2G/30 minutes)	
Storage Temperature			-20°C~70°C	
Working Temperature			-10°C~60°C	
Relative Humidity			10~85% RH (Non-condensing)	
CE Certification			CE Marked	
FCC Certification			FCC Class A	
HTTP Interface			Yes	
Remote Update			Yes	
Configuration Backup			Yes	
Off-line Transmission			Yes	
GPS	N/A	LBS	LBS	N/A

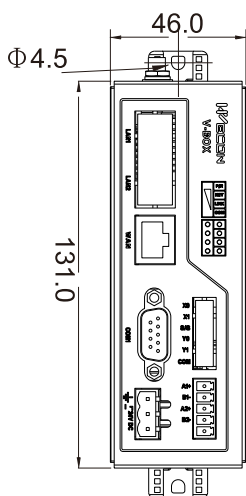

(Din rail)

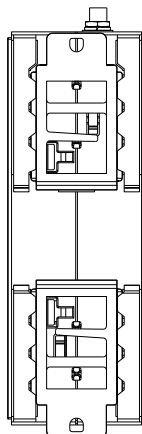

(Screw mount)

