



**micno** 深圳市迈凯诺电气股份有限公司  
SHENZHEN MICNO ELECTRIC CO., LTD.

 [www.micno.com.cn](http://www.micno.com.cn)

 [overseas@micno.com.cn](mailto:overseas@micno.com.cn)


 4th Floor, Building 1, Invengo RFID Industrial Park, Tongguan Road, Jiazitang,  
Guangming District, Shenzhen, China



Scan for more



PRODUCT  
CATALOGUE

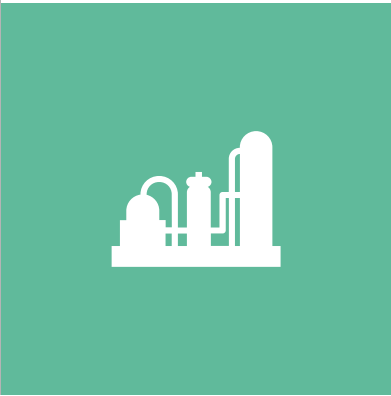

## ■ About MICNO

Shenzhen MICNO Electric Co., Ltd. is a national high-tech enterprise, which specializes in R&D, manufacture, sale and service of electrical drive, industrial automation products. MICNO headquarters is located in Guangming District Shenzhen city, has modern office and professional factory. MICNO has been a public company of NEEQ in China in 2016, with stock code 839477.

MICNO masters the leading synchronization, asynchronization current vector control technology, torque control technology and solar pump driving technology, including the main products such as general purpose inverter, various kinds of inverters of special industries and solar pump inverter. The products cover 220V, 380V, 460V, 525V, 660V voltage level with 0.4kW --1.6MW power range, which are widely used in electric power, metallurgy, petroleum and chemical, mining,

textile and chemical fiber, printing and packaging, paper-making, machine tool, plastic, hoisting, solar agricultural irrigation and other industries.

With "Market-oriented, Customer-centric" business philosophy, MICNO provides high cost performance products and service to customers, make the customers more competitive. The sales and service network is nationwide in domestic market. And our products have also been exported to more than 60 countries all over the world.

MICNO adheres to the enterprise core value of "Quality, Innovation, Integrity, Win-Win", dedicated to be the world famous supplier of products and services in the electric drive, industrial automation control fields, and would like to achieve customer, staff and enterprise values growing together.

## ■ Contents

- 03 ■ KE300A sensorless vector control inverter
- 14 ■ KE600A/KE600B close-loop vector control inverter
- 17 ■ KE300F open-loop permanent magnet synchronous drive
- 19 ■ KE330A open-structure sensorless vector control inverter
- 21 ■ KE610 energy-saving integrated cabinet
- 25 ■ Optional parts





# KE300A

## sensorless vector control inverter

KE300A incorporates perfectly the optimized asynchronous driving and years of experience; it is born for asynchronous driving motors! KE300A is built on TI's powerful DSP-based motor control chip, with the adoption of the sensorless current vector control (SVC) and open-loop torque control (TC). KE300A can be widely used for the asynchronous motor driving where better speed control and low-frequency torque are required.


S2	1AC	220V	0.4~11kW
T2	3AC	220V	0.4~200kW
T4	3AC	380V	0.75~1400kW
T6	3AC	660V	15~1600kW

## Product feature

01

### Excellent design and superb manufacturing process

With large design margin for key components and PCB;  
Adopting industry-leading automatic spraying and strict automatic testing standards, making sure more stable and reliable products;  
With optimized control algorithms and comprehensive protection functions, making more outstanding performance of the complete product.



02

### Powerful hardware speed tracking

With powerful hardware speed tracking, easily responding to the applications with large inertia requiring quick start.



03

### Accurate parameter identification

With an optimized motor parameter autotuning model, providing more precise identification.



04

### Enhanced oscillation suppression

With enhanced oscillation suppression, equal to all applications of motor current oscillation with facility.



05

### Fast current limiting

With fast current limiting function, easily responding to the conditions with sudden load, greatly reducing the probability of inverter's frequent over-current fault.



06

### Dual PID switching

With dual PID switching function, adapting to varied complicated conditions with flexibility.



07

Original energy-saving mode

With an original energy-saving mode, when at a light load, reducing the output voltage automatically, making more efficient energy saving.



08

Optimized V/F separation

With optimized V/F separation function, easily meeting various demands of the power inverter industry.



09

Flux-weakening control

Flux-weakening control, the max. frequency could be up to 3000Hz, easy for the applications requiring high speed.



10

Powerful PC monitoring software

With various background monitoring functions, facilitating on-site data collection and commissioning;

Capable of batch parameters upload and download, and autogeneration of commissioning documents.



Application

KE300A is widely applicable to fan, water pump, air compressor, machine tool, winding, centrifuge, conveyor belt, mixer, ball mill, medium frequency power supply, woodworking machinery, petrochemical industry, plastic machinery, industrial washing, simple hoisting equipment, etc., which require better speed control and low-frequency torque for asynchronous motor driving.



Model description

KE300A-5R5G / 7R5P-T4

Sensorless vector control inverter series

Power rating  
5R5: 5.5kW  
7R5: 7.5kW

G/P  
G: Constant torque type  
P: Variable torque type

Input voltage  
S2: 1AC 220V  
T2: 3AC 220V  
T4: 3AC 380V  
T6: 3AC 660V

Selection guide

Model	Motor		Rated Input Current (A)	Rated Output Current (A)
	kW	HP		
1AC 220~240V±15%				
KE300X-0R4G-S2	0.4	0.5	5.4	2.3
KE300X-0R7G-S2	0.75	1.0	8.2	4.0
KE300X-1R5G-S2	1.5	2.0	14.0	7.0
KE300-2R2G-S2	2.2	3.0	23.0	9.6
KE300A-004G-S2	4.0	5.0	25.0	15.0
KE300A-5R5G-S2	5.5	7.5	38.0	23.0
KE300A-7R5G-S2	7.5	10.0	50.0	32.0

3AC 220~240V±15%				
KE300X-0R4G-T2	0.4	0.5	3.4	2.3
KE300X-0R7G-T2	0.75	1.0	5.0	4.0
KE300X-1R5G-T2	1.5	2.0	7.7	7.0
KE300-2R2G-T2	2.2	3.0	10.5	9.0
KE300A-004G-T2	4.0	5	18	17
KE300A-5R5G-T2	5.5	7.5	26	25
KE300A-7R5G-T2	7.5	10	35	32
KE300A-011G-T2	11	15	46.5	45
KE300A-015G-T2	15	20	62.5	60
KE300A-018G-T2	18.5	25	76	75
KE300A-022G-T2	22	30	92	91
KE300A-030G-T2	30	40	113	112
KE300A-037G-T2	37	50	157	150
KE300A-045G-T2	45	60	180	176
KE300A-055G-T2	55	75	214	210
KE300A-075G-T2	75	100	307	304
KE300A-090G-T2	90	125	350	340

3AC 380~415V±15%				
KE300A-0R7G/1R5P-T4	0.75/1.5	1/2	3.4/5.0	2.1/3.8
KE300A-1R5G/2R2P-T4	1.5/2.2	2/3	5.0/6.8	3.8/6
KE300A-2R2G/004P-T4	2.2/4.0	3/5	6.8/10	6/9
KE300A-004G/5R5P-T4	4.0/5.5	5/7.5	10/15	9/13
KE300A-5R5G/7R5P-T4	5.5/7.5	7.5/10	15/20	13/17
KE300A-7R5G/011P-T4	7.5/11	10/15	20/26	17/25
KE300A-011G/015P-T4	11/15	15/20	26/35	25/32
KE300A-015G/018P-T4	15/18.5	20/25	35/38	32/37
KE300A-018G/022P-T4	18.5/22	25/30	38/46	37/45
KE300A-022G/030P-T4	22/30	30/40	46/62	45/60
KE300A-030G/037P-T4	30/37	40/50	62/76	60/75
KE300A-037G/045P-T4	37/45	50/60	76/90	75/90
KE300A-045G/055P-T4	45/55	60/75	92/113	90/110

KE300A-055G/075P-T4	55/75	75/100	112/157	110/150
KE300A-075G/090P-T4	75/90	100/125	157/180	150/176
KE300A-090G/110P-T4	90/110	125/150	180/214	176/210
KE300A-110G/132P-T4	110/132	150/175	214/256	210/253
KE300A-132G/160P-T4	132/160	175/210	256/307	253/304
KE300A-160G/185P-T4	160/185	210/250	307/350	304/340
KE300A-185G/200P-T4	185/200	250/260	350/385	340/377
KE300A-200G/220P-T4	200/220	260/300	385/430	377/423
KE300A-220G/250P-T4	220/250	300/330	430/468	423/465
KE300A-250G/280P-T4	250/280	330/370	468/525	465/520
KE300A-280G/315P-T4	280/315	370/420	525/590	520/585
KE300A-315G/350P-T4	315/350	420/470	590/665	585/640
KE300A-350G/400P-T4	350/400	470/530	665/785	640/720
KE300A-400G/450P-T4	400/450	530/600	785/840	720/820
KE300A-450G/500P-T4	450/500	600/660	840/880	820/900
KE300A-500G/560P-T4	500/560	660/750	880/980	900/1000
KE300A-560G/630P-T4	560/630	750/840	980/1130	1000/1100
KE300A-630G/710P-T4	630/710	840/950	1130/1290	1100/1250
KE300A-710G-T4	710	950	1290	1250
KE300A-800G-T4	800	1070	1450	1400
KE300A-900G-T4	900	1200	1630	1580
KE300A-1000G-T4	1000	1330	1800	1750
KE300A-1200G-T4	1200	1600	2160	2100
KE300A-1400G-T4	1400	2120	2420	2350

3AC 660~690V±15%				
KE300A-015G-T6	15	20	21	19
KE300A-018G-T6	18	25	28	22
KE300A-022G-T6	22	30	35	28
KE300A-030G-T6	37	40	40	35
KE300A-037G-T6	37	50	47	45
KE300A-045G-T6	45	60	55	52
KE300A-055G-T6	55	75	65	63



KE300A-075G-T6	75	100	90	86
KE300A-090G-T6	90	105	100	98
KE300A-110G-T6	110	130	130	121
KE300A-132G-T6	132	175	170	150
KE300A-160G-T6	160	210	200	175
KE300A-185G-T6	185	250	210	195
KE300A-200G-T6	200	260	235	215
KE300A-220G-T6	220	300	257	245
KE300A-250G-T6	250	330	265	260
KE300A-280G-T6	280	370	305	300
KE300A-315G-T6	315	420	350	330
KE300A-350G-T6	350	470	382	374
KE300A-400G-T6	400	530	435	410
KE300A-450G-T6	450	600	490	465
KE300A-500G-T6	500	660	595	550
KE300A-560G-T6	560	745	610	590
KE300A-630G-T6	630	840	710	680
KE300A-710G-T6	710	950	800	770
KE300A-800G-T6	800	1050	900	865
KE300A-900G-T6	900	1150	1000	970
KE300A-1000G-T6	1000	1330	1120	1080
KE300A-1200G-T6	1200	1600	1290	1280
KE300A-1400G-T6	1400	1860	1510	1460
KE300A-1600G-T6	1600	2130	1780	1720

Technical specifications

Item	Technical Index	Specification
Input	Input voltage	1AC/3AC 220V±15%, 3AC 380V±15%, 3AC 660V±15%
	Input frequency	47~63Hz
Output	Output voltage	0~rated input voltage
	Output frequency	V/f control: 0~3000Hz Sensorless vector control: 0~300Hz
Control Features	Control mode	V/f control Sensorless vector control Torque control
	Operation command mode	Keypad control Terminal control Serial communication control
	Frequency setting mode	Digital setting, analog setting, pulse frequency setting, serial communication setting, multi-step speed setting & simple PLC, PID setting, etc. These frequency settings can be combined & switched in various modes.
	Overload capacity	G model: 150% 60s, 180% 10s, 200% 3s P model: 120% 60s, 150% 10s, 180% 3s
	Starting torque	0.5Hz/150% (SVC); 1Hz/150% (V/f)
	Speed adjustment range	1:100 (SVC); 1:50(V/f)
	Speed control precision	±0.5% (SVC)
	Carrier frequency	1.0--16.0kHz, automatically adjusted according to temperature and load characteristics
	Frequency accuracy	Digital setting: 0.01Hz Analog setting: maximum frequency * 0.05%
	Torque boost	Automatically torque boost; manually torque boost: 0.1%~30.0%
	V/f curve	Three types: linear, multiple point and square type (1.2 power, 1.4 power, 1.6 power, 1.8 power, square)
	Acceleration/deceleration mode	Straight line/S curve; four kinds of acceleration/deceleration time, range: 0.1s~3600.0s
	DC braking	DC braking when starting and stopping DC braking frequency: 0.0Hz~maximum frequency, braking time: 0.0s~100.0s
	Jog operation	Jog operation frequency: 0.0Hz~maximum frequency Jog acceleration/deceleration time: 0.1s~3600.0s
	Simple PLC & multi-step speed operation	It can realize a maximum of 16 segments speed running via the built-in PLC or control terminal.
	Built-in PID	Built-in PID control to easily realize the close loop control of the process parameters (such as pressure, temperature, flow, etc.)
	Automatic voltage regulation	Keep output voltage constant automatically when input voltage fluctuating

Control Function	Common DC bus	Common DC bus for several inverters, energy balanced automatically
	Torque control	Torque control without PG
	Torque limit	"Router" characteristics, limit the torque automatically and prevent frequent over-current tripping during the running process
	Wobble frequency control	Multiple triangular-wave frequency control, special for textile
	Timing/length/counting control	Timing/length/counting control function
	Over-voltage & over-current stall control	Limit current & voltage automatically during the running process, prevent frequent over-current & over-voltage tripping
Input/output terminals	Fault protection function	Up to 30 fault protections including over-current, over-voltage, under-voltage, overheating, default phase, overload, shortcut, etc., can record the detailed running status during failure & has fault automatic reset function
	Input terminals	Programmable DI: 7 on-off inputs, 1 high-speed pulse input 2 programmable AI: AI1: 0~10V or 0/4~20mA A12: 0~10V or 0/4~20mA
	Output terminals	1 programmable open collector output: 1 analog output (open collector output or high-speed pulse output) 2 relay output 2 analog output: 0/4~20mA or 0~10V
	Communication terminals	Offer RS485 communication interface, support MODBUS-RTU communication protocol
Human machine interface	LED display	Display frequency setting, output frequency, output voltage, output current, etc.
	Multifunction key	QUICK/JOG key, can be used as multifunction key
Environment	Ambient temperature	-10℃ ~40℃ , derated 4% when the temperature rise by every 1℃ (40℃ ~50℃ ).
	Humidity	90%RH or less (non-condensing)
	Altitude	≤1000M: output rated power, >1000M: output derated
	Storage temperature	-20℃ ~60℃

Wiring diagram

